


Type CEA

This non-UL liquidtight flexible steel conduit is designed for applications where safety concerns exist regarding a material's reaction in a fire situation.



All Products Proudly Made in the USA

Construction:

Inner Core:

- Corrosion-resistant Plated Steel
- 3/8" – 2" Squarelock Profile
- 2-1/2" – 6" Fully Interlocked Profile
- 3/8" – 2" Contain Nylon Cord Packing

Liquidtight Jacket:

- Zero-Halogen Polyurethane
- Resistant to Ozone, Hydrocarbons, Moderate **Chemicals and Oils**
- Flame Retardant
- Low Smoke
- Low Toxicity
- Sunlight Resistant (UV)

Application:

- Meets the requirements of Bombardier SMP 800-C for Toxic Gas Generation.
- Meets the requirements of both ASTM E162 for Flame Spread and ASTM E662 for Smoke Generation.
- Mass Transit Vehicles
- Subways and Tunnels
- Enclosed Public Areas

Combustion & Flammability Properties

COMBUSTION & FLAMMABILITY

Vertical Burn (Material)

Vertical Burn (Conduit)

Oxygen Index %

Flame Spread Index

Smoke Generation (Flaming)

Smoke Generation (Non-Flaming)

Toxic Gas Generation

Toxicity Index

TEST

UL94

UL360

D2863

ASTM E162

ASTM E662 (NFPA 258)

ASTM E662 (NFPA 258)

BOMBARDIER SMP 800-C

NES 713

VALUE

V-0 Rating; No Flaming Drips

Pass; No Flaming Drips

28.5

25; No Flaming Drips

Ds 41@1.5 Min/Ds 113@4.0 Min

Ds 4@1.5 Min/Ds 19@4.0 Min

Pass

3.9

*Test data is based on controlled laboratory conditions and does not necessarily reflect performance in actual fire conditions. Additional product information available upon request.

Markets:

Healthcare, Oil & Gas Refineries, Rail/Transit, Steel Mills, Utilities

Product Information

CERTIFICATIONS & COMPLIANCE



WEEE and RoHS Compliant



BS EN IEC 61386 Classification

Code 445340650314 **CE**

Declaration

ARRA: For ARRA Certification


Letter, please [click here](#)

STANDARD COLORS

Gray and Black. **Other colors available upon request.**

WORKING TEMPERATURES

-40°C to 80°C

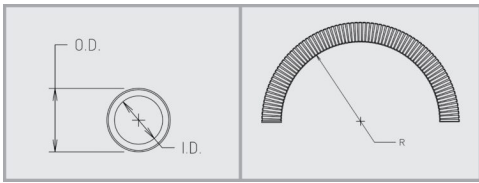

Product Table

	US Trade Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
	ISO (MM)	16	20	25	32	40	50	63	70	80	100	125	150
	CSA (MM)	12	16	21	27	35	41	53	63	78	103		
	Type	CEA-10	CEA-11	CEA-12	CEA-13	CEA-14	CEA-15	CEA-16	CEA-17	CEA-18	CEA-19	CEA-500	CEA-600
	Minimum Jacket Thickness	0.030	0.030	0.035	0.035	0.035	0.040	0.040	0.050	0.050	0.060	0.099	0.099
Internal Diameter	Min (IN.)	0.484	0.622	0.820	1.041	1.380	1.575	2.020	2.480	3.070	4.000	4.975	6.015
	Max (IN.)	0.504	0.642	0.840	1.066	1.410	1.600	2.045	2.505	3.100	4.040	5.035	6.075
Outer Diameter	Min (IN.)	0.690	0.820	1.030	1.290	1.630	1.865	2.340	2.840	3.460	4.460	5.505	6.565
	Max (IN.)	0.710	0.840	1.050	1.315	1.660	1.900	2.375	2.875	3.500	4.500	5.565	6.625
Inside Bend Radius	Static (IN.)	1.5	2.0	2.5	3.0	3.5	4.5	5.5	8.0	10.0	12.0	17.5	22.5
Weight	Lbs. per 100 Ft	20	24	33	53	68	88	102	168	252	344	468	572
Standard Length	Carton (Ft.)	100	100	100	100	50	50	50	25	25	25	25	25
	Part # (Gray)	888016	888116	888216	888326	888426	888526	888626	888726	888826	888926		
	Part # (Black)	88801	88811	88821	88832	88842	88852	88862	88872	88882	88892	88582	
	Reel (Ft.)	1000	1000	500	400	200	150	100					
	Part # (Gray)		888146	888246	888346	888446	888546	888646					
	Part # (Black)		88814	88824	88834		88854	88864					

related products



Type ZHLA

Non-halogen, low smoke and low flame spread make Type ZHLA a proven choice for applications where limiting toxic materials of combustion are an important issue. Since ZHLA is also UL listed and CSA Certified, it is ideal for field installation in confined, public areas such as subways, tunnels, etc.

[see product detail »](#)



Type ACEA

This non-UL liquidtight flexible aluminum conduit is designed for applications where safety concerns exist regarding a material's reaction in a fire situation and where weight is an issue.

[see product detail »](#)



Type CLFR

CLFR is a Low Fire Hazard nonmetallic nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables.

[see product detail »](#)



Type ATX

A non-UL Liquidtight Flexible Steel conduit designed to withstand an extreme temperature range.

[see product detail »](#)