

Type CSA

This flexible liquidtight steel conduit is certified by the Canadian Standards Association. Its design and function is similar to that of type LA, except that it cannot be used as a ground return path per the Canadian code.



All Products Proudly Made in the USA

Construction:

Inner Core:

- Hot Dipped Galvanized Steel
- 3/8" – 1-1/4" Squarelock Profile with continuous cord packing
- 1-1/2" – 4" Fully Interlocked Profile

Liquidtight Jacket:

- Flexible PVC
- Resistant to **Oils and Mild Acids**
- FT-4 Flame Retardant
- Sunlight Resistant (UV)

APPLICATION:

This conduit is intended for use according to the Canadian Electrical Code (CEC CSA 22.1) as described in clause 12-1300 for dry, damp or wet locations.

Hazardous Locations areas where flexibility is necessary:


- Class II CSA 22.1 Clause 18-202(4)(b)
- Class III CSA 22.1 Clause 18-302(4)


Markets:


Mining, Oil & Gas Refineries, Power Plants, Steel Mills, Utilities

Product Information

CERTIFICATIONS & COMPLIANCE

 Certified File #LL18858. Conforms to CSA Standard C22.2 No 56. Flame Test Rating FT-4 per CSA Standard C22.2 No 0.3.

 **WEEE and RoHS Compliant**

 BS EN IEC 61386 Classification Code 445240650414 **CE**

Declaration


ARRA: For ARRA Certification Letter, please [click here](#)

STANDARD COLORS


Black. **Other colors available upon request.**

WORKING TEMPERATURES


-40°C to 75°C



**Squarelock with Filler Sizes:
3/8" - 1-1/4"**

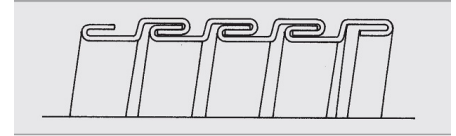

Interlock Sizes: 1-1/2" - 4"

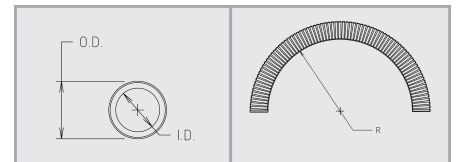

Product Table

	US Trade Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
	ISO (MM)	16	20	25	32	40	50	63	70	80	100
	CSA (MM)	12	16	21	27	35	41	53	63	78	103
	Type	CSA-10	CSA-11	CSA-12	CSA-13	CSA-14	CSA-15	CSA-16	CSA-17	CSA-18	CSA-19
Internal Diameter	Min (IN.)	0.484	0.622	0.820	1.041	1.380	1.575	2.020	2.480	3.070	4.000
	Max (IN.)	0.504	0.642	0.840	1.066	1.410	1.600	2.045	2.505	3.100	4.040
Outer Diameter	Min (IN.)	0.690	0.820	1.030	1.290	1.630	1.865	2.340	2.840	3.460	4.460
	Max (IN.)	0.710	0.840	1.050	1.315	1.660	1.900	2.375	2.875	3.500	4.500
Inside Bend Radius	Static (IN.)	2.0	3.3	4.3	6.5	8.0	9.0	11.0	14.8	17.5	24.0
	Dynamic (IN.)	4.0	5.0	6.0	12.0	15.0	17.0	22.0	30.0	36.0	52.0
Weight	Lbs. per 100 Ft	29	32	53	82	102	124	145	192	252	350
Standard Length	Carton (Ft.)	100	100	100	100	50	50	50	25	25	25
	Part # (Black)	70101	71101	72101	73102	74102	75102	76102	77102	78102	79102
	Reel (Ft)	500	500	500	400	200	150	100			
	Part # (Black)	70103	71103	72104	73104	74104	75104	76104			
	Reel (Ft)	1000	1000	1000							
	Part # (Black)	70104	71104	72110							


related products



Type ATLA

A liquidtight flexible steel conduit designed specifically for extreme hot or cold environments. The flexible inner core is identical to that found in Type LA. The specially formulated PVC jacket remains flexible at low temperatures and resists aging at elevated temperatures. It is listed by Underwriters Laboratories Inc. and certified by Canadian Standards Association

[see product detail »](#)



Type CBLA

Computer Blue LA (CBLA) is a liquidtight flexible steel conduit commonly used for computer room installations. The blue jacket color easily identifies circuitry for computer power wiring. It is listed by Underwriters Laboratories Inc. and certified by Canadian Standards Association.

[see product detail »](#)



Type LA

A flexible steel conduit which is both listed by Underwriters Laboratories Inc. and certified by Canadian Standards Association. It offers outstanding protection against wet, oily conditions and is permitted for use in exposed or concealed locations.

[see product detail »](#)



Type ZHLA

Non-halogen, low smoke and low flame spread make Type ZHLA a proven choice for applications where limiting toxic materials of combustion are an important issue. Since ZHLA is also UL listed and CSA Certified, it is ideal for field installation in confined, public areas such as subways, tunnels, etc.

[see product detail »](#)