

Type EF

This non-UL flexible liquidtight conduit is a competitive grade version of our type LT designed for a variety of installations requiring motion, vibration and bending. It offers good mechanical and moisture protection to enclosed conductors.



All Products Proudly Made in the USA

Construction:

Inner Core:

- Corrosion Resistant Plated Steel
- 3/8" – 2" Squarelock Profile

Liquidtight Jacket:

- Flexible PVC
- Sunlight Resistant (UV)
- Resistant to **Oils and Mild Acids**
- Dynamic Flexibility, Limited

Application:

- Machine Tools
- Industrial Environments
- Wet and Oily Locations
- Outdoor use due to the inherent UV resistance of PVC
- Compatible with standard liquidtight connectors

Markets:

Construction, Machine Tool (OEM)

Product Information

CERTIFICATIONS & COMPLIANCE

Manufactured to UL 360

Dimensions



WEEE and RoHS Compliant



BS EN IEC 61386 Classification

Code 443140650314 **CE**

Declaration

ARRA: For ARRA Certification

Letter, please [click here](#)



BABA Compliant


STANDARD COLORS

Machine Tool Gray.

WORKING TEMPERATURES

-20°C to 80°C

-4°F to 176°F

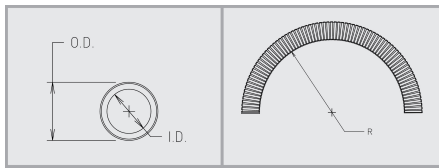

Product Table

	US Trade Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	ISO (MM)	16	20	25	32	40	50	63
	CSA (MM)	12	16	21	27	35	41	53
	Type	EF-10	EF-11	EF-12	EF-13	EF-14	EF-15	EF-16
Internal Diameter	Min (MM)	12.3	15.8	20.8	26.4	35.1	40.0	51.3
	Max (MM)	12.8	16.3	21.3	27.1	35.8	40.6	51.9
Outside Diameter	Min (MM)	17.5	20.8	26.2	32.8	41.4	47.4	59.4
	Max (MM)	18.0	21.3	26.7	33.4	42.2	48.3	60.3
Inside Bend Radius	Static (MM)	38	51	64	76	89	115	140
	Dynamic (MM)	102	127	152	305	381	432	559
Weight	(Kgs) per 30 meters	9.0	11.0	14.0	20.0	27.0	35.0	47.0
Standard Length	Carton (Mtrs)	30.0	30.0	30.0	30.0	15.0	15.0	15.0
	Part #	80101	80111	80122	80132	80142	80152	80162
	Reel (Mtrs)	150.0	150.0	150.0	120.0	60.0	45.0	30.0
	Part #	80103	80113	80124	80137	80147	80154	80164
	Reel (Mtrs)	300.0	300.0	300.0				
	Part #	80104	80114	80127				

related products



Type LT

A general purpose flexible, oil-resistant, non-UL spec grade liquidtight steel conduit designed for a variety of installations requiring motion, vibration and bending. It offers good mechanical and moisture protection to enclosed conductors.


[see product detail »](#)



Type LA

A flexible steel conduit which is both listed by Underwriters Laboratories Inc. and certified by Canadian Standards Association for "Heavy-Duty" applications. It offers outstanding protection against wet, oily conditions and is permitted for use in exposed or concealed locations.

[see product detail »](#)



Type AT

A flexible steel non-UL conduit that uses a jacketing material specifically designed for hot or cold environments.