

# Type LAFG

A UL Listed flexible liquidtight steel conduit designed for a variety of installations regarding motion, vibration and bending on food processing equipment.



All Products Proudly Made in the USA

## Construction:

### Inner Core:

- Hot Dipped Galvanized Steel
- 3/8" – 1-1/4" Squarelock Profile with continuous bonding strip
- 1-1/2" – 2" Fully Interlocked Profile

### Liquidtight Jacket:

- Flexible PVC made from an FDA approved compound
- Formulated for "Splash Zone" food and beverage contact
- Meets FDA CFR21 and NSF 51/61 requirements
- Resistant to **Oils and Mild Acids**
- Flame Retardant
- Sunlight Resistant (UV)

## Application:

Type LAFG is a Certified Component for NSF/ANSI 169 special purpose food equipment. The following points are in addition to all of the NEC (ANSI/NFPA-70) Article 350 installation guidelines outlined for Type LA **[NEMA RV3]** flexible liquidtight conduit:


- Smooth exterior for easy washdown
- Resistant to Sodium Hypochlorite (Bleach)
- Will not promote bacteria growth
- Intended for use with Standard Liquidtight Connectors

## Industries Served:


- Poultry Processing & Misc. Food Manufacturing (SIC 2015)
- Food Product Machinery Manufacturing (SIC 2011)
- Pharmaceutical Preparation Manufacturing (SIC 2834)
- Food Packaging, Canning and Bottling

## Product Information

### CERTIFICATIONS & COMPLIANCE


 Listed File # E29278. Conforms to Underwriters Laboratories Standard ANSI/UL-360 for Liquidtight Flexible Steel conduit.

 **WEEE and RoHS Compliant**

 BS EN IEC 61386 Classification Code 444240650414 **CE**

#### Declaration

**ARRA:** For ARRA Certification Letter, please [click here](#)

 NSF Certified Component **NSF Listing**

### STANDARD COLORS


White. **Other colors available upon request.**

### WORKING TEMPERATURES

-30°C to 80°C Dry / 60°C Wet / 70°C Oil


# Markets:

Food Processing, Healthcare, Pharmaceuticals




**Squarelock with Filler Sizes:**  
**3/8" - 1-1/4"**

\*Sizing above 2", consult factory for pricing and minimum runs.

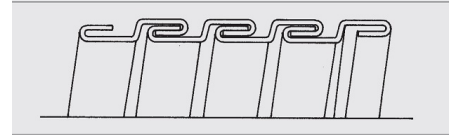

**Interlock Sizes: 1-1/2" - 2"**

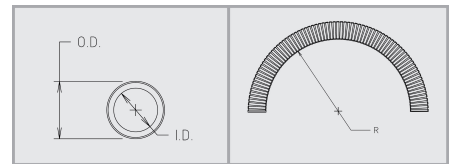

# Product Table

	US Trade Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	ISO (MM)	16	20	25	32	40	50	63
	CSA (MM)	12	16	21	27	35	41	53
	Type	LAFG-10	LAFG-11	LAFG-12	LAFG-13	LAFG-14	LAFG-15	LAFG-16
Internal Diameter	Min (IN.)	0.484	0.622	0.820	1.041	1.380	1.575	2.020
	Max (IN.)	0.504	0.642	0.840	1.066	1.410	1.600	2.045
Outer Diameter	Min (IN.)	0.690	0.820	1.030	1.290	1.630	1.865	2.340
	Max (IN.)	0.710	0.840	1.050	1.315	1.660	1.900	2.375
Inside Bend Radius	Static (IN.)	2.0	3.0	4.2	5.5	7.0	4.5	6.0
	Dynamic (IN.)	4.0	5.0	6.0	12.0	15.0	17.0	22.0
Weight	Lbs. per 100 Ft	29	32	53	82	102	124	145
Standard Length	Carton (Ft.)	100	100	100	100	50	50	50
	Part #	20901	21901	22901	23902	24902	25902	26902
	Reel (Ft)	500	500	500	400	200	150	100
	Part #	20903	21903	22904	23904	24904	25904	26904
	Reel (Ft)	1000	1000	1000				
	Part #	20904	21904	22910				

**related products**



## Type LSSFG

A flexible non-UL liquidtight stainless steel conduit designed for a variety of installations requiring motion, vibration and bending on food processing equipment. It offers excellent resistance to corrosion.

[see product detail »](#)



## Type LTFG

A general-purpose, non-UL flexible liquidtight steel conduit designed for a variety of installations regarding motion, vibration and bending on food processing equipment.

[see product detail »](#)



## Type NMFG

A Food Grade nonmetallic liquidtight conduit that offers excellent protection to wiring from abrasion, sunlight, mild acids, alkaline and oils. It is intended for food and beverage machinery applications.

[see product detail »](#)