

Type ZHLA

Non-halogen, low smoke and low flame spread make Type ZHLA a proven choice for applications where limiting toxic materials of combustion are an important issue. Since ZHLA is also UL listed and CSA Certified, it is ideal for field installation in confined, public areas such as subways, tunnels, etc.



All Products Proudly Made in the USA

Construction:

Inner Core:

- Hot Dipped Galvanized Steel
- 3/8" – 1-1/4" Squarelock Profile with continuous bonding strip
- 1-1/2" – 4" Fully Interlocked Profile

Liquidtight Jacket:

- Zero-Halogen Polyurethane
- Resistant to Ozone, Hydrocarbons, **Chemicals and Oils**
- Flame Retardant
- Low Smoke
- Low Toxicity
- Sunlight Resistant (UV)

Application:


- Meets the requirements of Bombardier SMP 800-C for Toxic Gas Generation.
- Meets the requirements of both ASTM E162 for Flame Spread and ASTM E662 for Smoke Generation.


This conduit is intended for installation in accordance with Article 350 of the NEC (ANSI/NFPA-70) and in section 14.5.4 of the ANSI/NFPA-79 Standard for Industrial Machinery:

- Listed and marked for Direct Burial and in Poured Concrete
- For containment of 1000 volt and lower potential circuits
- Suitable as a grounding conductor when used for circuits rated up to 20A for the 3/8 & 1/2 inch trade sizes and 60A for the 3/4 through 1-1/4 inch trade sizes in lengths six feet or less per NEC Article 250.118(7). Larger sizes require separate grounding conductor.
- Installations in hazardous (classified) locations:
 - Class I Div. 2: Article 501.10 (B)(2) & 501.30 (B)
 - Class II Div. 1: Article 502.1 (A)(2) & 502.30 (B) Div. 2: 502.10 (B)(2)
 - Class III Div. 1: Article 503.10 (A)(2) & 503.30 (B) Div. 2: 503.10 (A)(2)
- Installed under raised floors in Data Processing Areas Articles 645.5 (2)
- Electric Signs and Outline Lighting over 1000 volts Articles 600.7/600.32(A)(1)
- Permitted for Service Entrance wiring to six feet Article 230.43
- Used as Feeders and Services at Marinas and Boatyards Article 553.7(B).
- Wiring on Building Article 225.10
- Conductor Enclosures Adjacent to Motors over 1000 V Article 430.223
- Underground Service, Feeder, Branch Circuit, and Recreational Vehicle Site Feeder Circuit Conductors Article 551.80
- Elevators and Hoistways Article 620.21
- Pools and Fountains Article 680
- Bodies of water. Article 682
- Fire Pumps. Article 695


Product Information

CERTIFICATIONS & COMPLIANCE

 Listed File # E29278. Conforms to Underwriters Laboratories Standard ANSI/UL-360 for Liquidtight Flexible Steel conduit.

 Certified File #LL18858. Conforms to CSA 22.2 No.56 for use per the Canadian Electrical Code C22.1 Section 12-1300. FT1

 **WEEE and RoHS Compliant**

 BS EN IEC 61386 Classification Code 445240650414 **CE Declaration**

ARRA: For ARRA Certification Letter, please [click here](#)

STANDARD COLORS

Black. **Other colors available upon request.**

WORKING TEMPERATURES

UL: -40°C to 80°C Air / 60°C Wet / 70°C Oil
 CSA: -40°C to 60°C Dry / 60°C Oil

Combustion & Flammability Properties

COMBUSTION & FLAMMABILITY

Vertical Burn (Material)
 Vertical Burn (Conduit)
 Oxygen Index %
 Flame Spread Index

TEST

UL94
 UL360
 D2863
 ASTM E162

VALUE

V-0 Rating; No Flaming Drips
 Pass; No Flaming Drips
 28.5
 25; No Flaming Drips

Smoke Generation (Flaming)

ASTM E662 (NFPA 258)

Ds 41@1.5 Min/Ds 113@4.0 Min

Smoke Generation (Non-Flaming)

ASTM E662 (NFPA 258)

Ds 4@1.5 Min/Ds 19@4.0 Min

Toxic Gas Generation

BOMBARDIER SMP 800-C

Pass

Toxicity Index

NES 713

3.9

* Test data is based on controlled laboratory conditions and does not necessarily reflect


performance in actual fire conditions. Additional product information available upon request.

Markets:

Construction, Data Centers, Defense, Healthcare, Mining, Oil & Gas Refineries, Power

Plants, Rail/Transit, Renewable Energy, Security, Ship Building, Steel

Mills, Telecommunications, Utilities

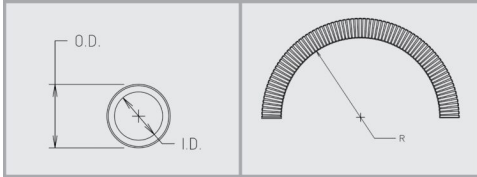

Product Table

	US Trade Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"
	ISO (MM)	16	20	25	32	40	50	63	70	80	90	100
	CSA (MM)	12	16	21	27	35	41	53	63	78	91	103
	Type	ZHLA-10	ZHLA-11	ZHLA-12	ZHLA-13	ZHLA-14	ZHLA-15	ZHLA-16	ZHLA-17	ZHLA-18	ZHLA-350	ZHLA-19
Internal Diameter	Min (IN.)	0.484	0.622	0.820	1.041	1.380	1.575	2.020	2.480	3.070	3.500	4.000
	Max (IN.)	0.504	0.642	0.840	1.066	1.410	1.600	2.045	2.505	3.100	3.540	4.040
Outer Diameter	Min (IN.)	0.690	0.820	1.030	1.290	1.630	1.865	2.340	2.840	3.460	3.960	4.460
	Max (IN.)	0.710	0.840	1.050	1.315	1.660	1.900	2.375	2.875	3.500	4.000	4.500
Inside Bend Radius	Static (IN.)	2.0	3.0	4.2	5.5	7.0	4.5	6.0	8.0	10.0	11.0	12.0
Weight	Lbs. per 100 Ft	29	32	53	82	102	124	145	192	252	308	350
Standard Length	Carton (Ft.)	100	100	100	100	50	50	50	25	25	25	25
	Part # (Black)	88101	88111	88121	88132	88142	88152	88162	88172	88182	88187	88192
	Reel (Ft)	500	500	500	400	200	150	100				
	Part # (Black)	88103	88113	88124	88134	88144	88154	88164				
	Reel (Ft)	1000	1000	1000								
	Part # (Black)	88104	88114	88125								

related products



Type CEA

This non-UL liquidtight flexible steel conduit is designed for applications where safety concerns exist regarding a material's reaction in a fire situation

[see product detail »](#)



Type ACEA

This non-UL liquidtight flexible aluminum conduit is designed for applications where safety concerns exist regarding a material's reaction in a fire situation and where weight is an issue.

[see product detail »](#)



Type CLFR

CLFR is a Low Fire Hazard nonmetallic nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables.

[see product detail »](#)



Type ATX

A non-UL Liquidtight Flexible Steel conduit designed to withstand an extreme temperature range.

[see product detail »](#)