

Type FSC

This non-UL, non-jacketed flexible steel conduit has many universal wiring applications.

Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip

Application:

- Intended for applications where UL Listing is NOT REQUIRED.
- Recommended Fittings: Internal (screw in) connectors intended for FMC (Flexible Metal Conduit)

Markets:

Construction



All Products Proudly Made in the USA

Product Information


CERTIFICATIONS & COMPLIANCE




WEEE and RoHS Compliant

ARRA: For ARRA Certification

Letter, please [click here](#)

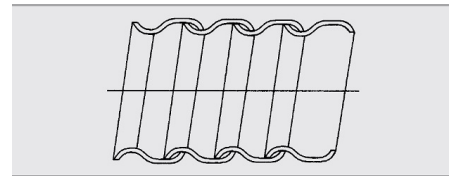

Type FSC Strip Profile

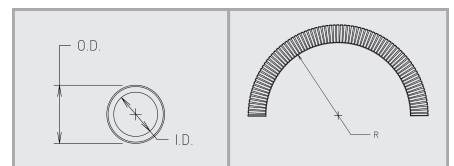

Product Table

US Trade Size	ISO (MM)	CSA (MM)	Type	Internal Diameter		Inside Bend Radius	Weight	Standard Length			
				Min (IN.)	Max (IN.)	Static (IN.)	Lbs. per 100 Ft	Coil (IN.)	Part #	Reel (IN.)	Part #
3/8"	16	12	FSC-10	0.375	0.393	2.0	13	100	69501	1000	69504
1/2"	20	16	FSC-11	0.625	0.645	3.0	19	100	69511	1000	69514
3/4"	25	21	FSC-12	0.812	0.835	4.0	25	100	69522	500/1000	69523/69524
1"	32	27	FSC-13	1.000	1.040	5.0	28	50	69532	400	69534
1 1/4"	40	35	FSC-14	1.250	1.300	6.2	38	50	69542	400	69544
1 1/2"	50	41	FSC-15	1.500	1.575	7.5	48	25	69552	300	69554
2"	63	53	FSC-16	2.000	2.080	10.0	100	25	69562	150	69564
2 1/2"	70	63	FSC-17	2.500	2.700	12.5	166	25	69572		
3"	80	78	FSC-18	3.000	3.200	15.0	190	25	69582		
3 1/2"	90	91	FSC-350	3.500		17.5	170	25	69587		
4"	100	103	FSC-19	4.000		20.0	200	25	69592		

related products



Type BR

"Blue Ribbon" (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as "Greenfield" or "Reduced Wall Flex".

[see product detail »](#)