

Type FSC

This non-UL, non-jacketed flexible steel conduit has many universal wiring applications.

Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip

Application:

- Intended for applications where UL Listing is NOT REQUIRED.
- Recommended Fittings: Internal (screw in) connectors intended for FMC (Flexible Metal Conduit)

Markets:

Construction



All Products Proudly Made in the USA

Product Information


CERTIFICATIONS & COMPLIANCE




WEEE and RoHS Compliant

ARRA: For ARRA Certification

Letter, please [click here](#)

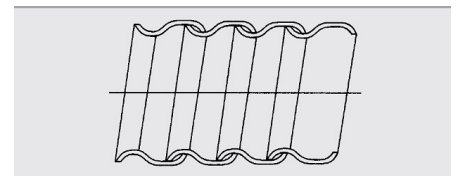

Type FSC Strip Profile

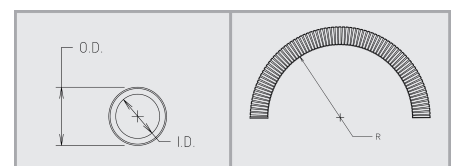

Product Table

US Trade Size	ISO (MM)	CSA (MM)	Type	Internal Diameter		Inside Bend Radius	Weight	Standard Length			
				Min (MM)	Max (MM)	Static (MM)	Kgs per n30 meters	Coil (Mtrs)	Part #	Reel (Mtrs)	Part #
3/8"	16	12	FSC-10	9.5	10.0	51	6	30	69501	300	69504
1/2"	20	16	FSC-11	15.9	16.4	76	9	30	69511	300	69514
3/4"	25	21	FSC-12	20.6	21.2	102	11	30	69522	150/300	69523/69524
1"	32	27	FSC-13	25.4	26.4	127	13	15	69532	120	69534
1 1/4"	40	35	FSC-14	31.8	33.0	157	17	15	69542	120	69544
1 1/2"	50	41	FSC-15	38.1	40.0	191	22	8	69552	90	69554
2"	63	53	FSC-16	50.8	52.8	254	45	8	69562	45	69564
2 1/2"	70	63	FSC-17	63.5	68.6	318	75	8	69572		
3"	80	78	FSC-18	76.2	81.3	381	86	8	69582		
3 1/2"	90	91	FSC-350	88.9		445	77	8	69587		
4"	100	103	FSC-19	101.6		508	91	8	69592		

related products



Type BR

"Blue Ribbon" (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as "Greenfield" or "Reduced Wall Flex".

[see product detail »](#)