

# TYPE SL

*This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.*

## Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip
- Also available in stainless steel, **Type SSL**, consult factory

## Application:

- Offers good mechanical protection to wiring in a variety of OEM applications.

## Markets:

Security



All Products Proudly Made in the USA

## Product Information


### CERTIFICATIONS & COMPLIANCE




**WEEE and RoHS Compliant**

**ARRA:** For ARRA Certification

Letter, please [click here](#)

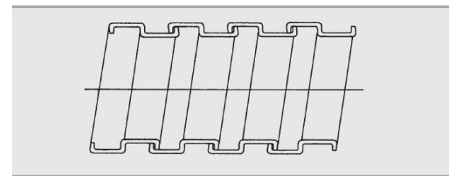

## Squarelock

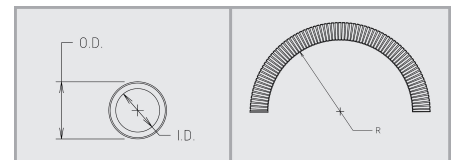

# Product Table

Trade Size Metric	Type	Internal Diameter		Outside Diameter		Inside Bend Radius	Weight	Standard Length	
		Min (MM)	Max (MM)	Min (MM)	Max (MM)	Static (MM)	(Kgs) per 30 meters	Coil (Mtrs)	Part #
	SL-316	4.4	5.1	7.1	7.9	19.1	2	75	91202
	SL-140	6.0	6.7	8.3	9.1	19.1	3	75	92202
	SL-516	7.5	8.3	9.9	10.7	19.1	3	75	93202
	SL-380	9.1	9.9	12.3	13.1	25.4	4	75	94202
	SL-716	10.7	11.5	13.9	14.7	25.4	4	75	95202
16mm	SL-10	12.5	13.0	15.7	16.2	25.4	5	75	96202
	SL-916	13.9	14.7	17.1	17.8	31.8	5	45	99206
	SL-11	15.8	16.3	19.0	19.5	38.1	7	45	97202
20mm	SL-11M	16.5	17.0	19.7	20.2	38.1	7	45	972021
	SL-340	18.7	19.4	22.0	22.7	38.1	8	45	98202
25mm	SL-12	21.0	21.5	24.3	24.8	50.8	8	30	98222
	SL-13	26.4	27.1	30.3	30.9	50.8	12	15	98232
32mm	SL-13M	28.0	28.5	31.8	32.3	50.8	12	15	982321

## related products



### TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



### TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

[see product detail »](#)



### Type VJC

Vacuum jacketed non-UL steel conduit for high-flex installations.

[see product detail »](#)



### Type CL

CL is a nonmetallic UL Recognized nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables. It is used as a UL / CSA component within OEM equipment.

[see product detail »](#)