

TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

Construction:

- Brite Tin Plated Steel
- Helically wound, interlocking formed strip
- Note: Electrical trade sizes do not apply to Type UG

Application:

- The bright appearance of the finished product lends itself to installations where the conduit may be visible after the final assembly.
- Mates with a variety of setscrew and clamp type connectors.

Markets:

Security



All Products Proudly Made in the USA

Product Information


CERTIFICATIONS & COMPLIANCE




WEEE and RoHS Compliant

ARRA: For ARRA Certification

Letter, please [click here](#)

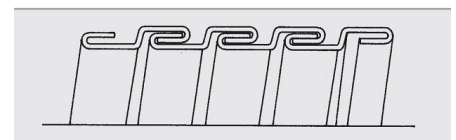

Interlock

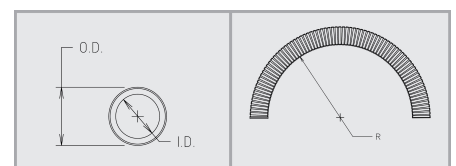

Product Table

| Type | Internal Diameter | | Outside Diameter | | Inside Bend Radius | Weight | Standard Length | |
|--------|-------------------|----------|------------------|----------|--------------------|---------------------|-----------------|--------|
| | Min (MM) | Max (MM) | Min (MM) | Max (MM) | Static (MM) | (Kgs) per 30 meters | Coil (Mtrs) | Part # |
| UG-380 | 11.3 | 12.0 | 14.3 | 15.1 | 63.5 | 7 | 15 | 91101 |
| UG-120 | 19.2 | 19.9 | 22.2 | 23.0 | 76.2 | 10 | 15 | 92101 |
| UG-340 | 24.0 | 24.7 | 27.0 | 27.8 | 88.9 | 12 | 15 | 93101 |
| UG-100 | 30.7 | 31.4 | 33.7 | 34.5 | 114.3 | 15 | 15 | 94101 |
| UG-125 | 37.7 | 38.5 | 40.1 | 40.8 | 139.7 | 23 | 15 | 95101 |
| UG-150 | 44.1 | 44.8 | 46.8 | 47.6 | 165.1 | 25 | 15 | 96101 |
| UG-200 | 56.8 | 57.5 | 60.7 | 61.5 | 215.9 | 36 | 15 | 97101 |
| UG-250 | 69.5 | 70.2 | 74.6 | 75.4 | 266.7 | 39 | 15 | 98101 |
| UG-300 | 85.3 | 86.1 | 87.3 | 88.1 | 330.2 | 48 | 15 | 99101 |

related products



TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



Type VJC

Vacuum jacketed non-UL steel conduit for high-flex installations.

[see product detail »](#)



Type CL

CL is a nonmetallic UL Recognized nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables. It is used as a UL / CSA component within OEM equipment.

[see product detail »](#)