

TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip

Application:

- Intended as a factory installed component
- Modular Office Partitions
- Showcase Lighting
- Range Hoods
- Mates with a variety of setscrew and clamp type connectors

Markets:

Security



All Products Proudly Made in the USA

Product Information

CERTIFICATIONS & COMPLIANCE



UL Recognized File #E53253


CSA Report # LO 4000-4875




WEEE and RoHS Compliant

ARRA: For ARRA Certification

Letter, please [click here](#)

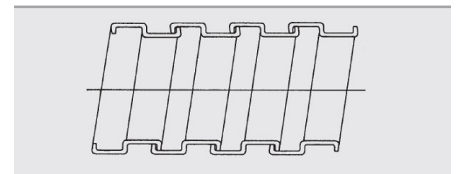

Squarelock - Type USL

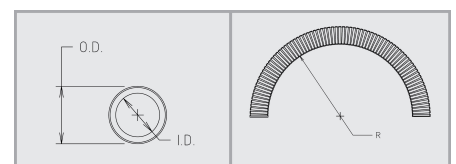

Product Table

US Trade Size	ISO (MM)	CSA (MM)	Type	Internal Diameter		Outer Diameter		Inside Bend Radius	Weight	Standard Length	
				Min (IN.)	Max (IN.)	Min (IN.)	Max (IN.)	Static (IN.)	Lbs. per 100 Ft	Coil (Ft.)	Part #
			USL-516	0.297	0.327	0.457	0.487	1 1/4	12	250	91402
			USL-380	0.360	0.390	0.520	0.550	1 1/4	15	250	92402
			USL-716	0.422	0.452	0.572	0.612	1 1/2	17	250	93402
3/8"	16	12	USL-120	0.485	0.515	0.645	0.675	1 1/2	19	250	94402
			USL-916	0.557	0.577	0.707	0.737	1 1/2	20	250	95402
1/2"	20	16	USL-580	0.622	0.642	0.732	0.765	2	24	100	96402
3/4"	25	21	USL-340	0.820	0.840	0.930	0.960	2	32	100	97402

related products



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

[see product detail »](#)



Type CL

CL is a nonmetallic UL Recognized nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables. It is used as a UL / CSA component within OEM equipment.

[see product detail »](#)



Type VJC

Vacuum jacketed non-UL steel conduit for high-flex installations.

[see product detail »](#)