

TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip

Application:

- Intended as a factory installed component
- Modular Office Partitions
- Showcase Lighting
- Range Hoods
- Mates with a variety of setscrew and clamp type connectors

Markets:


Security



All Products Proudly Made in the USA

Product Information

CERTIFICATIONS & COMPLIANCE

 UL Recognized File #E53253


CSA Report # LO 4000-4875




WEEE and RoHS Compliant

ARRA: For ARRA Certification

Letter, please [click here](#)

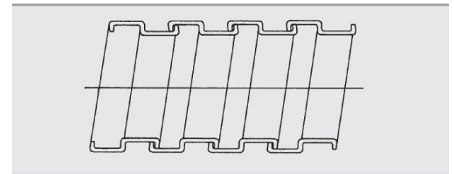

Squarelock - Type USL

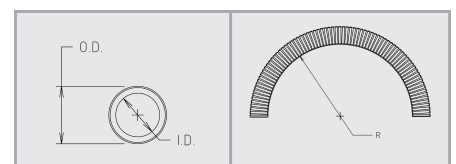

Product Table

US Trade Size	ISO (MM)	CSA (MM)	Type	Internal Diameter		Outside Diameter		Inside Bend Radius	Weight	Standard Length	
				Min (MM)	Max (MM)	Min (MM)	Max (MM)	Static (MM)	(Kgs) per 30 meters	Coil (Mtrs)	Part #
			USL-516	7.5	8.3	11.6	12.4	32	5	75	91402
			USL-380	9.1	9.9	13.2	14.0	32	7	75	92402
			USL-716	10.7	11.5	14.5	15.5	38	8	75	93402
3/8"	16	12	USL-120	12.3	13.1	16.4	17.1	38	9	75	94402
			USL-916	14.1	14.7	18.0	18.7	38	9	75	95402
1/2"	20	16	USL-580	15.8	16.3	18.6	19.4	51	11	30	96402
3/4"	25	21	USL-340	20.8	21.3	23.6	24.4	51	15	30	97402

related products



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

[see product detail »](#)



Type CL

CL is a nonmetallic UL Recognized nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables. It is used as a UL / CSA component within OEM equipment.

[see product detail »](#)



Type VJC

Vacuum jacketed non-UL steel conduit for high-flex installations.

[see product detail »](#)