

Type ZHSS

This non-UL liquidtight stainless steel flexible conduit is designed for applications where safety concerns exist regarding a material's reaction in a fire situation. It offers excellent resistance to corrosion.



All Products Proudly Made in the USA

Construction:

Inner Core:

- Corrosion-resistant continuous strip of 316L Stainless Steel.
- Also available in 304L Stainless Steel, special order only. Minimum order quantities may apply.

Liquidtight Jacket:

- Zero Halogen Polyurethane
- Resistant to Ozone, Hydrocarbons, Moderate **Chemicals and Oils**
- Flame Retardant
- Low Smoke
- Low Toxicity
- Sunlight Resistant (UV)

Application:

- Corrosive Environments
- Meets the requirements of Bombardier SMP 800-C for Toxic Gas Generation.
- Meets the requirements of both ASTM E162 for Flame Spread and ASTM E662 for Smoke Generation.
- Industrial Environments
- Wet and Oily Locations
- Compatible with standard liquidtight connectors

Combustion & Flammability Properties

COMBUSTION & FLAMMABILITY

TEST

VALUE

Vertical Burn (Material)	UL94	V-0 Rating; No Flaming Drips
Vertical Burn (Conduit)	UL360	Pass; No Flaming Drips
Oxygen Index %	D2863	28.5
Flame Spread Index	ASTM E162	25; No Flaming Drips
Smoke Generation (Flaming)	ASTM E662 (NFPA 258)	Ds 41@1.5 Min/Ds 113@4.0 Min
Smoke Generation (Non-Flaming)	ASTM E662 (NFPA 258)	Ds 4@1.5 Min/Ds 19@4.0 Min
Toxic Gas Generation	BOMBARDIER SMP 800-C	Pass
Toxicity Index	NES 713	3.9

* Test data is based on controlled laboratory conditions and does not necessarily reflect performance in actual fire conditions. Additional product information available upon request.


Markets:

Defense, Healthcare, Mining, Oil & Gas Refineries, Power Plants, Ship Building, Steel Mills, Wastewater Treatment

Product Information

CERTIFICATIONS & COMPLIANCE

Manufactured to UL 360
Dimensions

 **WEEE and RoHS Compliant**

CE BS EN IEC 61386 Classification
Code 445240650314 **CE Declaration**


ARRA: For ARRA Certification Letter, please [click here](#)

STANDARD COLORS

Black. **Other colors available upon request.**

WORKING TEMPERATURES

-40°C to 80°C

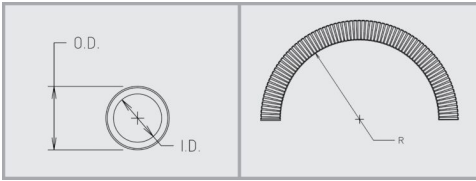

Product Table

	US Trade Size	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	3"	4"
	ISO (MM)	16	20	25	32	40	50	63	80	100
	CSA (MM)	12	16	21	27	35	41	53	78	103
	Type	ZHSS-10	ZHSS-11	ZHSS-12	ZHSS-13	ZHSS-14	ZHSS-15	ZHSS-16	ZHSS-18	ZHSS-19
Internal Diameter	Min (IN.)	0.484	0.622	0.820	1.041	1.380	1.575	2.020	3.070	4.000
	Max (IN.)	0.504	0.642	0.840	1.066	1.410	1.600	2.045	3.100	4.040
Outer Diameter	Min (IN.)	0.690	0.820	1.030	1.290	1.630	1.865	2.340	3.460	4.460
	Max (IN.)	0.710	0.840	1.050	1.315	1.660	1.900	2.375	3.500	4.500
Inside Bend Radius	Static (IN.)	2.0	3.0	4.2	5.5	7.0	4.5	6.0	10.0	12.0
Weight	Lbs. per 100 Ft	23	28	38	62	79	103	119	295	410
Standard Length	Coil (Ft.)	100	100	100	100	50	50	50	25	25
	Part #									
	Reel (Ft.)	500	500	500	400	200	150	100	175	100
	Part #									
	Reel (Ft.)	1000	1000	1000						
Part #										

related products



Type LTSS

A flexible non-UL liquidtight stainless steel conduit designed for a variety of installations requiring motion, vibration and bending. It offers excellent resistance to corrosion.

[see product detail »](#)



Type LSSFG

A flexible non-UL liquidtight stainless steel conduit designed for a variety of installations requiring motion, vibration and bending on food processing equipment. It offers excellent resistance to corrosion.

[see product detail »](#)



Type ZHLA

Non-halogen, low smoke and low flame spread make Type ZHLA a proven choice for applications where limiting toxic materials of combustion are an important issue. Since ZHLA is also UL listed and CSA Certified, it is ideal for field installation in confined, public areas such as subways, tunnels, etc.

[see product detail »](#)



Type CEA

This non-UL liquidtight flexible steel conduit is designed for applications where safety concerns exist regarding a material's reaction in a fire situation

[see product detail »](#)