

Flexible Metal Pre-Assembled Whips

Used for lighting fixture installations as well as many other electrical equipment uses. These metallic whips consist of UL listed flexible metal conduit Type BR, stranded (stock) or solid THHN wire with 6" leads, and internal, zinc die-cast fittings with steel locknuts.

Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip
- Reduced Wall Steel Gauge

Application:

Fixture Whips are made per NEC requirements unless otherwise specified and are UL listed under Wiring Assemblies (QQYZ) category.

- AWG 14 = 15 Amp
- AWG 12 = 20 Amp
- Additional configurations available upon request.
- Packaged in 25 piece cartons and 250 piece drums.
- For further information and NEC Code applications, see **Type BR**.

Options Available:

- Aluminum Conduit Pre-Assembled Whips
- Liquatite Metallic Whips
- Solid and Stranded Conductors
- Snap-In Connectors
- Additional configurations available upon request
- Packaged in 25 piece cartons and 250 piece drums
- LED luminaire fixture whips




All Products Proudly Made in the USA

Product Information

CERTIFICATIONS & COMPLIANCE



Listed File #E105410

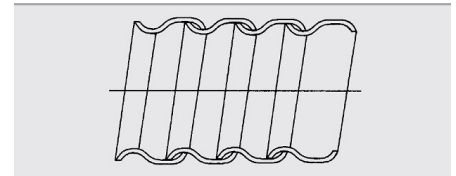

Types BR and ABR Strip Profile

Product Table

| Part Number | Trade Size | Length | Wire Gauge & Configuration | | Quantity |
|-------------|------------|--------|----------------------------|------------|----------|
| SW10122 | 3/8" | 72" | 12/2 | BLK-WT | 25,250 |
| SW10123 | 3/8" | 72" | 12/3 | BLK-WT-GRN | 25,250 |
| SW10142 | 3/8" | 72" | 14/2 | BLK-WT | 25,250 |
| SW10143 | 3/8" | 72" | 14/3 | BLK-WT-GRN | 25,250 |
| SW10144 | 3/8" | 72" | 14/4 | BLK-WT-RED | 25,250 |
| SW10182 | 3/8" | 72" | 18/2 | BLK-WT | 25,250 |
| SW10183 | 3/8" | 72" | 18/3 | BLK-WT-GRN | 25,250 |

related products



Type BR

"Blue Ribbon" (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as "Greenfield" or "Reduced Wall Flex".

[see product detail »](#)



Nonmetallic A/C Whips

Commonly used in air conditioner, pool and sauna installations. Consists of UL listed flexible nonmetallic conduit, one nonmetallic straight connector and one nonmetallic 90° connector.

[see product detail »](#)