

Type CL

Part of the **CORRLOK® / Reiku Nylon System.**

CL is a nonmetallic UL Recognized nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables. It is used as a UL / CSA component within OEM equipment.

Construction:

- Made from a specially compounded homogenous flame retardant nylon 6 material
- Corrugated for flexibility and strength
- Self-extinguishing
- Resistant to alcohol, grease, mineral oil, diesel oil, weather, sunlight (UV), and more (consult factory for the full list)

Application:

- Intended to be used to interconnect separate component assemblies or consoles of electrical devices
- Medical and X-ray equipment
- Electronics
- Fiber Optics
- Wire Harnesses

Fittings:

Type CL is intended to be used only with the CF series of the CORRLOK® / Reiku System connectors and adapters.


Markets:

Aerospace, Renewable Energy, Telecommunications



Product Information

CERTIFICATIONS & COMPLIANCE

 Conforms to UL 1696 CSA 22.2 No. 227.3 Harmonized Standard



WEEE and RoHS Compliant


STANDARD WEIGHT

Black

WORKING TEMPERATURES:

-40°C to 105°C Intermittent to 150°C *

* Intermittent temperatures to 150°C are not evaluated by UL.

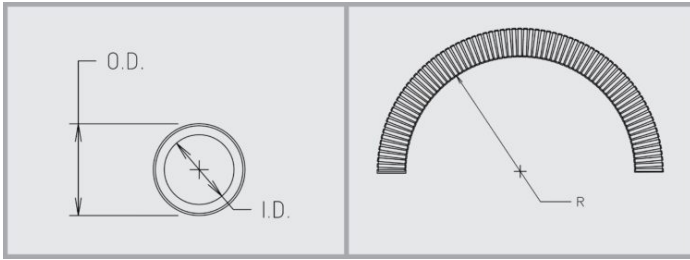

Product Table

U.S. Trade Size	MM	NW	Type	Reiku	Nominal Dimensions		Inside Static Bend Radius	Weight	Standard Length	
					Black	Inside (mm)			Outside (mm)	mm.
1/4"	10	7	CL-140	PA R E B-07G	6.4	10	15	0.7	30	79001
5/16"	12	10	CL-516	PA R E B-10F	9.6	13	20	0.8	30	79071
3/8"	16	12	CL-10	PA R E B-12F	11.9	15.5	30	1.0	30	79081
1/2"	20	17	CL-11	PA R E B-17F	16.6	21.2	35	1.7	30	79181
3/4"	25	23	CL-12	PA R E B-23F	22.8	28.3	45	2.7	30	79281
1"	32	29	CL-13	PA R E B-29F	28.1	34.5	65	3.7	15	79381
1-1/4"	40	36	CL-14	PA R E B-36F	36.2	42.5	85	4.2	15	79481
1-1/2"	50	48	CL-15	PA R E B-48F	47.7	54.5	95	5.6	15	79581
2-1/2"	70	70	CL-17	PA R E B-70G	70	82.5	160	13.5	9	79686
3-1/2"	95	90	CL-350	PA R E B-95G	90	106	210	21.9	9	79886

related products



Type CLR

CLR is a nonmetallic nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables.

[see product detail »](#)



Type CLFR

CLFR is a Low Fire Hazard nonmetallic nylon corrugated Mechanical Protection Tubing (MPT) designed for the support and routing of conductors and cables.

[see product detail »](#)



Type CF & CFF Straight Connectors



Type CF & CFF 90 Degree Connectors

Type CF and CFF nonmetallic straight connectors are UL Recognized and intended to be used with Corrllok corrugated nylon Mechanical Protection Tubing (MPT) Types CL, CLR and CLFR. They are used as a UL / CSA component within OEM equipment.

[see product detail »](#)

Type CF and CFF nonmetallic 90° connectors are UL Recognized and intended to be used with Corrllok corrugated nylon Mechanical Protection Tubing (MPT) Types CL, CLR and CLFR. They are used as a UL / CSA component within OEM equipment.

[see product detail »](#)

UL
CORRLLOK