

TYPE SSL

This non-UL, extra-flexible product, unjacketed, stainless steel conduit is available in smaller diameters and designed for corrosive environments, as well as tight-spot installations.

Construction:

- Continuously spiral wound and squarelocked 304L stainless steel.
- Also available in 316L stainless steel, minimum order quantities will apply.

Application:

- Offers excellent resistance to corrosive environments.
- Extra flexible for tight bent applications.
- Intended for use with various set screw or clamp type connectors.

Markets:

Security




All Products Proudly Made in the USA

Product Information


CERTIFICATIONS & COMPLIANCE



WEEE and RoHS Compliant

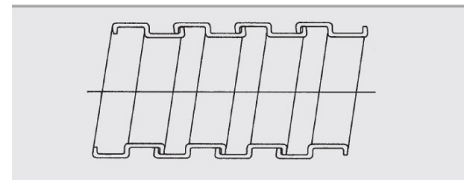

Squarelock

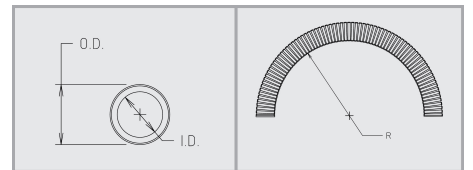

Product Table

US Trade Size	Type	Internal Diameter		Outer Diameter		Inside Bend Radius	Weight
		Min (IN.)	Max (IN.)	Min (IN.)	Max (IN.)	Static (IN.)	Lbs. per 100 Ft
	SSL-316	0.172	0.202	0.280	0.310	0.75	4.4
	SSL-140	0.235	0.265	0.328	0.358	0.75	5.6
5/16"	SSL-516	0.297	0.327	0.391	0.421	0.75	6.8
	SSL-380	0.360	0.390	0.485	0.515	1.00	8.0
	SSL-716	0.422	0.452	0.547	0.577	1.00	11.1
3/8"	SSL-10	0.493	0.512	0.617	0.637	1.00	12.5
	SSL-916	0.547	0.577	0.672	0.702	1.25	13.9
1/2"	SSL-11	0.622	0.642	0.747	0.767	1.50	15.3
	SSL-340	0.735	0.765	0.865	0.895	1.50	18.1
3/4"	SSL-12	0.827	0.847	0.957	0.977	2.00	24.0
1"	SSL-13	1.041	1.066	1.191	1.216	2.00	27.3
1 1/4"	SSL-14	1.380	1.410	1.540	1.570	3.00	
1 1/2"	SSL-15	1.575	1.600	1.735	1.770	3.50	
2"	SSL-16	2.020	2.045	2.180	2.215	3.50	75.3
2 1/2"	SSL-17	2.500	2.545	2.680	2.715	4.50	
3"	SSL-18	3.000	3.045	3.180	3.215	5.50	158.0

related products



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



Type BR

"Blue Ribbon" (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as "Greenfield" or "Reduced Wall Flex".

[see product detail »](#)



TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



Private: TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

[see product detail »](#)