

TYPE SSL

This non-UL, extra-flexible product, unjacketed, stainless steel conduit is available in smaller diameters and designed for corrosive environments, as well as tight-spot installations.



All Products Proudly Made in the USA

Construction:

- Continuously spiral wound and squarelocked 304L stainless steel.
- Also available in 316L stainless steel, minimum order quantities will apply.

Application:

- Offers excellent resistance to corrosive environments.
- Extra flexible for tight bent applications.
- Intended for use with various set screw or clamp type connectors.

Markets:


Utilities

Product Information


CERTIFICATIONS & COMPLIANCE



WEEE and RoHS Compliant

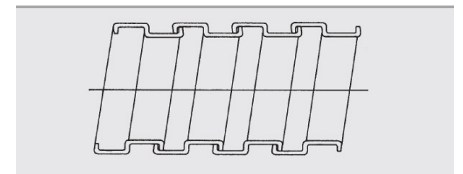

Squarelock

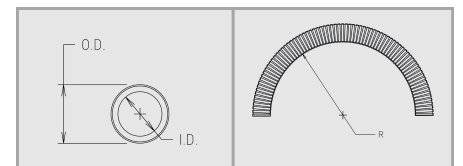

Product Table

| US Trade Size | Type | Internal Diameter | | Outside Diameter | | Inside Bend Radius | Weight (Kgs) per 30 meters |
|---------------|---------|-------------------|----------|------------------|----------|--------------------|-------------------------------|
| | | Min (MM) | Max (MM) | Min (MM) | Max (MM) | Static (MM) | |
| | SSL-316 | 4.4 | 5.1 | 7.1 | 7.9 | 19.05 | 2.0 |
| | SSL-140 | 6.0 | 6.7 | 8.3 | 9.1 | 19.05 | 2.5 |
| 5/16" | SSL-516 | 7.5 | 8.3 | 9.9 | 10.7 | 19.05 | 3.1 |
| | SSL-380 | 9.1 | 9.9 | 12.3 | 13.1 | 25.4 | 3.6 |
| | SSL-716 | 10.7 | 11.5 | 13.9 | 14.7 | 25.4 | 5.0 |

| | | | | | | | |
|--------|---------|------|------|------|------|-------|------|
| 3/8" | SSL-10 | 12.5 | 13.0 | 15.7 | 16.2 | 25.4 | 5.7 |
| | SSL-916 | 13.9 | 14.7 | 17.1 | 17.8 | 31.75 | 6.3 |
| 1/2" | SSL-11 | 15.8 | 16.3 | 19.0 | 19.5 | 38.1 | 6.9 |
| | SSL-340 | 18.7 | 19.4 | 22.0 | 22.7 | 38.1 | 8.2 |
| 3/4" | SSL-12 | 21.0 | 21.5 | 24.3 | 24.8 | 50.8 | 10.9 |
| 1" | SSL-13 | 26.4 | 27.1 | 30.3 | 30.9 | 50.8 | 12.4 |
| 1 1/4" | SSL-14 | 35.1 | 35.8 | 39.1 | 39.9 | 76.2 | 0.0 |
| 1 1/2" | SSL-15 | 40.0 | 40.6 | 44.1 | 45.0 | 88.9 | 0.0 |
| 2" | SSL-16 | 51.3 | 51.9 | 55.4 | 56.3 | 88.9 | 34.1 |
| 2 1/2" | SSL-17 | 63.5 | 64.6 | 68.1 | 69.0 | 114.3 | 0.0 |
| 3" | SSL-18 | 76.2 | 77.3 | 80.8 | 81.7 | 139.7 | 71.7 |

related products



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



Type BR

"Blue Ribbon" (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as "Greenfield" or "Reduced Wall Flex".

[see product detail »](#)



TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



Private: TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

[see product detail »](#)