



TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

Construction:

- Hot Dipped Galvanized Steel
- Helically wound, formed strip

Application:

- Offers good mechanical protection to wiring in a variety of OEM applications.
- Mates with a variety of setscrew and clamp-type connectors.

Markets:

Security



All Products Proudly Made in the USA

Product Information

CERTIFICATIONS & COMPLIANCE




WEEE and RoHS Compliant

ARRA: For ARRA Certification


Letter, please [click here](#)



BABA Compliant

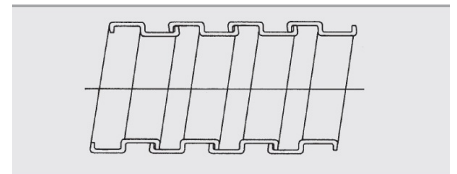

Squarelock

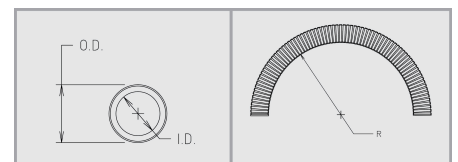

Product Table

Trade Size Metric	Type	Internal Diameter		Outside Diameter		Inside Bend Radius	Weight	Standard Length	
		Min (MM)	Max (MM)	Min (MM)	Max (MM)	Static (MM)	(Kgs) per 30 meters	Coil (Mtrs)	Part #
16mm	SL-316	4.4	5.1	7.1	7.9	19.1	2	75	91202
	SL-140	6.0	6.7	8.3	9.1	19.1	3	75	92202
	SL-516	7.5	8.3	9.9	10.7	19.1	3	75	93202
	SL-380	9.1	9.9	12.3	13.1	25.4	4	75	94202
	SL-716	10.7	11.5	13.9	14.7	25.4	4	75	95202
	SL-10	12.5	13.0	15.7	16.2	25.4	5	75	96202
	SL-916	13.9	14.7	17.1	17.8	31.8	5	45	99206
	SL-11	15.8	16.3	19.0	19.5	38.1	7	45	97202
	SL-340	18.7	19.4	22.0	22.7	38.1	8	45	98202
	SL-12	21.0	21.5	24.3	24.8	50.8	8	30	98222
25mm	SL-13	26.4	27.1	30.3	30.9	50.8	12	15	98232

related products



TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



Type VJC

Vacuum jacketed non-UL steel conduit for high-flex installations.

[see product detail »](#)



Type BR

“Blue Ribbon” (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as “Greenfield” or “Reduced Wall Flex”.

[see product detail »](#)



Type ABR

Aluminum “Blue Ribbon” (ABR) This UL listed non-jacketed flexible aluminum conduit has many universal wiring applications. It is often referred to as “Greenfield” or “Reduced Wall Flex”.

[see product detail »](#)