

# TYPE SSL

*This non-UL, extra-flexible product, unjacketed, stainless steel conduit is available in smaller diameters and designed for corrosive environments, as well as tight-spot installations.*

## Construction:

- Continuously spiral wound and squarelocked 304L stainless steel.
- Also available in 316L stainless steel, minimum order quantities will apply.

## Application:

- Offers excellent resistance to corrosive environments.
- Extra flexible for tight bent applications.
- Intended for use with various set screw or clamp type connectors.

## Markets:

Security




All Products Proudly Made in the USA

## Product Information


### CERTIFICATIONS & COMPLIANCE



WEEE and RoHS Compliant

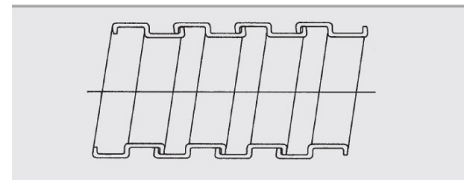

## Squarelock

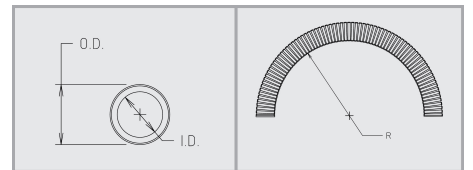

# Product Table

US Trade Size	Type	Internal Diameter		Outside Diameter		Inside Bend Radius	Weight (Kgs) per 30 meters
		Min (MM)	Max (MM)	Min (MM)	Max (MM)	Static (MM)	
	SSL-316	4.4	5.1	7.1	7.9	19.05	2.0
	SSL-140	6.0	6.7	8.3	9.1	19.05	2.5
5/16"	SSL-516	7.5	8.3	9.9	10.7	19.05	3.1
	SSL-380	9.1	9.9	12.3	13.1	25.4	3.6
	SSL-716	10.7	11.5	13.9	14.7	25.4	5.0
3/8"	SSL-10	12.5	13.0	15.7	16.2	25.4	5.7
	SSL-916	13.9	14.7	17.1	17.8	31.75	6.3
1/2"	SSL-11	15.8	16.3	19.0	19.5	38.1	6.9
	SSL-340	18.7	19.4	22.0	22.7	38.1	8.2
3/4"	SSL-12	21.0	21.5	24.3	24.8	50.8	10.9
1"	SSL-13	26.4	27.1	30.3	30.9	50.8	12.4
1 1/4"	SSL-14	35.1	35.8	39.1	39.9	76.2	0.0
1 1/2"	SSL-15	40.0	40.6	44.1	45.0	88.9	0.0
2"	SSL-16	51.3	51.9	55.4	56.3	88.9	34.1
2 1/2"	SSL-17	63.5	64.6	68.1	69.0	114.3	0.0
3"	SSL-18	76.2	77.3	80.8	81.7	139.7	71.7

## related products



### TYPE SL

This non-UL, extra-flexible product, available in the smaller diameters, is designed for tight-spot installation and where continuous flexing is required of a steel wound hose.

[see product detail »](#)



### Type BR

"Blue Ribbon" (BR) This UL listed non-jacketed flexible steel conduit has many universal wiring applications. It is often referred to as "Greenfield" or "Reduced Wall Flex".

[see product detail »](#)



### TYPE USL

This extra-flexible steel conduit is recognized by UL and CSA for use within listed and certified assemblies.

[see product detail »](#)



### Private: TYPE UG

A fully-interlocked, non-UL flexible steel conduit designed for high strength in "tight-spot" installations.

[see product detail »](#)